


# Contact To ESPA 4.4.4. converter

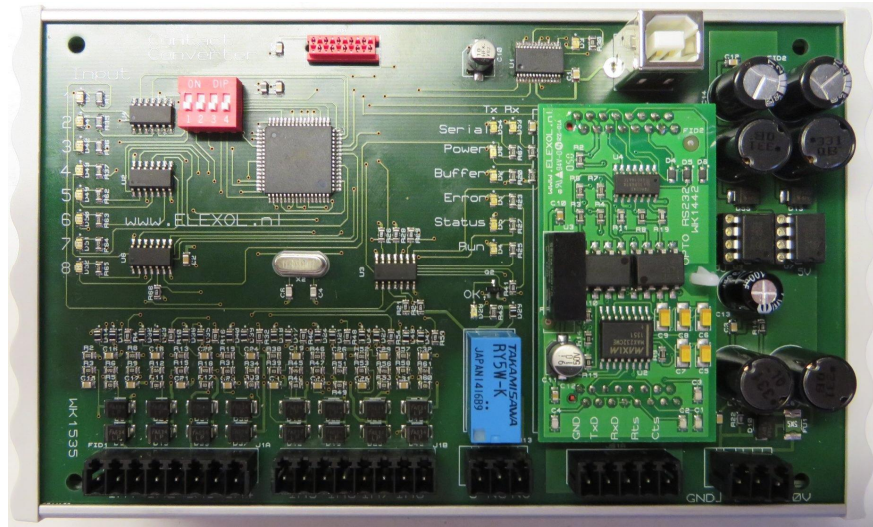

Datasheet

Contact to  
ESPA 4.4.4.  
converter

[www.elexol.nl](http://www.elexol.nl)

## Technical datasheet

---

Power supply:	Power supply: 12V-30VDC 2 W.
ESPA 4.4.4. Serial setup:	1200, 2400, 4800 or 9600 baud 7 or 8 databits 1 or 2 stopbits Parity none, parity even or parity odd RTS/CTS handshake can be enabled.
Inputs	8 inputs which can be individually programmed: Enabled or not Guarded or unguarded input Normally opened or normally closed Address, bleepcode and Textmessage at enabled input Address, bleepcode and Textmessage at disabled input Repeat time
Relay outputs:	1 relay, with normally closed and normally opened Contacts to forward Failures from ESPA and Contact inputs (if enabled). Power rate: 80V AC / 60 VA
Setup:	The setup of the converter is done with the software-tool ConfigToolC2E
Led indicators for:	Tx and Rx of ESPA 4.4.4. 8 indicators for each input Call in buffer indicator Software running led Error indicator Status indicator

## **ESPA 4.4.4. devices tested:**

---

Paging Equipment:      Ascom/Nira  
                                      Bosch Alphadesk  
                                      Elexol IP2ESPA converter